

# standard order form

This form is used when ordering the following starting blocks:

- Velocity with trackstart
- Legacy Launch
- Legacy Launch Side Mount
- Universal
- Velocity w/o trackstart
- Legacy
- Legacy Side Mount
- Legacy II Side Mount

Help us serve your clients better by including architectural line drawings and specifications for new installations, and line drawings and/or photos for existing applications.

## Distributor Information

Date: \_\_\_\_\_

Company	Contact Name
Phone	Email

## Project Job Information

Institution	Contact Name
Address	City - State - Zip
Phone	Email

S.R.Smith manufactures a wide range of starting blocks for use at all levels of competitive swimming, and takes into consideration rules and regulations from the Federation Internationale de Natation (FINA), USA Swimming, National Collegiate Athletic Association (NCAA), National Federation of State High School Associations (NFSHSA), and the Model Aquatic Health Code (MAHC). S.R.Smith and end user also recognize that state and local building codes apply in various jurisdictions.

Starting blocks are specified in each organization's rules and regulations at various minimum water depths:

FINA: 4 feet 5 inches

USA Swimming: 4 feet for competition, 6 feet for teaching, 6 feet 7 inches for championship meets

NCAA: 4 feet

NFSHSA: 4 feet

MAHC: 4 feet

S.R.Smith takes these minimum water depths into consideration on each order for starting blocks.

With this information, S.R.Smith suggests the following recommendations for maximum starting block height over water:

Less than 4 feet of water depth: no starting blocks

4 feet - 6 feet of water depth: 18 inches

6 feet or more of water depth: 29.5 inches

**Distributor and End User understand that regulations of governing bodies, including those listed above along with state and local codes, supersede these recommendations when they require additional depth. For example, a pool that will host FINA swim meets cannot place starting blocks in water depths of less than 4 feet 5 inches because it does not meet the minimum depth for FINA. By ordering, purchasing and installing S.R.Smith starting blocks, the Distributor and End User acknowledge receipt and understanding of the above recommendations.**


p: 503.266.2231  
tf: 800.824.4387  
f: 503.266.4334  
e: sales@srsmith.com




# standard order form

## 1 - Model


(circle selected model)




Velocity with Track Start




Velocity with Track Start Side Mount - Left




Velocity with Track Start Side Mount - Right




Velocity w/o Track Start




Velocity w/o Track Start Side Mount - Left




Velocity w/o Track Start Side Mount - Right




Legacy Launch




Legacy Launch Side Mount - Left




Legacy Launch Side Mount - Right




Legacy




Legacy Side Mount Left




Legacy Side Mount Right



Legacy II Side Mount Left



Legacy II Side Mount Right



Universal

p: 503.266.2231  
 tf: 800.824.4387  
 f: 503.266.4334  
 e: sales@srsmith.com



# standard order form

## 2 - Dimensions

### A - Water Depth

\_\_\_\_\_ Feet    \_\_\_\_\_ Inches

Please add any additional dimensions (parapet, gutter, etc.) that will affect the design or placement of the starting block to Figure 1.

### B - Block Height

For water depth greater than 6', the recommended height above water is 29.5". For water depths 4' to 6', the recommended height above water is 18". S.R.Smith does not recommend installing starting blocks on water depths shallower than 4'.

Total height above water (29.5", 18", or a custom height): \_\_\_\_\_

Deck to water height: \_\_\_\_\_

Height of block above deck: \_\_\_\_\_

### C - Block Setback

The setback, measured from water's edge to the center of the starting block post (See Figure 1), ranges from 21" to 26" in one-inch increments. Things to consider are interference from gutters, parapets, and coping. The center point of the anchor should be at least 5" from any edge of the concrete slab.

Setback = \_\_\_\_\_

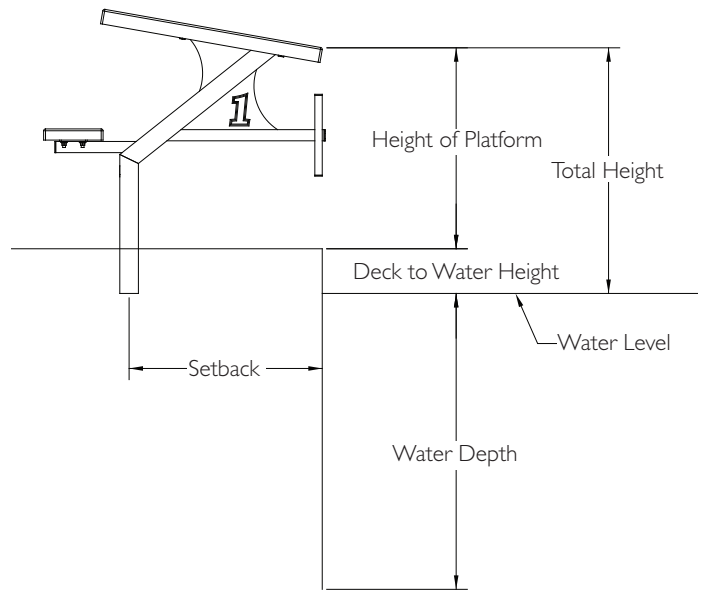


Figure 1

# standard order form

## 3 - Order Details

### A - Quantity

How many blocks would you like to order? \_\_\_\_\_

### B - Frame Color

Standard Color for a Legacy, Legacy Launch and Velocity is Silver Gray. Other colors are available. There is no fee for any of our standard colors listed in table 1. Place a check next to your desired color or identify a custom color (RAL # is the most accurate way to specify custom colors).

*Custom colors will incur additional fees and lead-time.*

FRAME COLOR	
<input type="checkbox"/>	Silver Gray
<input type="checkbox"/>	Royal Blue
<input type="checkbox"/>	Taupe
<input type="checkbox"/>	White

Table 1

### C - Numbering

How would you like the blocks numbered (i.e., 12 starting blocks could be numbered 1-12, two sets of 1-6, or 1-11 with one blank)? \_\_\_\_\_

### D - Anchors

It is possible to have the anchors shipped before the blocks to allow anchor installation prior to delivery of the starting blocks. Notify your salesperson if you would be interested in having the anchors shipped prior to shipping the blocks.


### E - Backstroke Handles

The standard backstroke handle is the H-Handle. U-Handle, Horizontal, and Angled configurations are also available.


*Please check the desired handle. If no option is marked, the Backstroke H-Handle will be used.*



Horizontal



H-Handle



Angled



U-Handle

p: 503.266.2231  
tf: 800.824.4387  
f: 503.266.4334  
e: sales@srsmith.com

**SR Smith™**

# standard **order form**

## 4 - Special Request

Only one of the following choices can be selected for your starting block order.  
*These items also include additional charges and lead time.*

### A - TrueTread™ (Velocity only)

Velocity footboards are available in a choice of four TrueTread™ colors. Place a mark next to the desired color in Table 2.

TRUETREAD™ COLOR	
<input type="checkbox"/>	Gray
<input type="checkbox"/>	Blue
<input type="checkbox"/>	Red
<input type="checkbox"/>	Yellow

Table 2

### B - Logo / Footboard Numbers (not available with TrueTread™)

If you would like a logo or numbering placed on the footboards, please email file in .pdf or .eps formats. We will send a separate drawing of the logo/numbering placement on the footboard to be signed off along with the drawing for the starting block(s).

- YES, we want a logo.  
 YES, we want numbering placed on the footboard.

### C - Sand Tread

**Note:** Colored treads are not available if you have specified a logo or number be placed on the tread.

You can get the tread for the footboard and step in a selection of colors. Place a mark next to the desired color in Table 3. *Standard color for the tread is white. White will be used if there is no color tread or logo selected.*

SAND TREAD COLOR	
<input type="checkbox"/>	Yellow
<input type="checkbox"/>	Red
<input type="checkbox"/>	Green
<input type="checkbox"/>	Blue

Table 3

Distributor and End User understand that regulations of governing bodies, including those listed above along with state and local codes, supersede these recommendations when they require additional depth. For example, a pool that will host FINA swim meets cannot place starting blocks in water depths of less than 4 feet 5 inches because it does not meet the minimum depth for FINA. By ordering, purchasing and installing S.R.Smith starting blocks, the Distributor and End User acknowledge receipt and understanding of the above recommendations.

End User Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Printed Name: \_\_\_\_\_ Date: \_\_\_\_\_

Distributor Signature: \_\_\_\_\_

Printed Name: \_\_\_\_\_

**Return completed and signed form to S.R.Smith:**

fax: 503.266.4334

email as a scanned .pdf attachment: sales@srsmith.com

p: 503.266.2231  
tf: 800.824.4387  
f: 503.266.4334  
e: sales@srsmith.com

